



1~4 Output Medical Type

120W Medical series


Output Chart

MODEL	OUTPUT VOLTAGE	RATED CURRENT	OUTPUT CURRENT				RIPPLE & NOISE (Max.) (Note 2)	VOLTAGE TOLERANCE (Note 3)	LINE REGULATION	LOAD REGULATION	EFFICIENCY
			MINIMUM LOAD	CONVECTION (max.)	WITH FAN (25CFM)	PEAK LOAD WITH 25CFM FAN (Note 4)					
MPS-120-3.3	3.3V	24A	0A	16A	24A	26A	80mVp-p	±3.0%	±1.0%	±3.0%	68%
MPS-120-5	5V	22A	0A	14.7A	22A	26A	80mVp-p	±3.0%	±1.0%	±3.0%	73%
MPS-120-12	12V	10A	0A	6.7A	10A	11A	100mVp-p	±2.0%	±1.0%	±2.0%	77%
MPS-120-15	15V	8A	0A	5.3A	8A	8.8A	100mVp-p	±2.0%	±1.0%	±2.0%	79%
MPS-120-24	24V	5A	0A	3.3A	5A	5.5A	120mVp-p	±2.0%	±1.0%	±2.0%	81%
MPS-120-48	48V	2.5A	0A	1.7A	2.5A	2.8A	120mVp-p	±2.0%	±1.0%	±2.0%	82%
MPD-120A	5V	10A	2A	7.3A	10A	12A	80mVp-p	±2.0%	±0.5%	±0.5%	75%
	12V	5A	0.5A	3.6A	5A	6A	120mVp-p	±7.0%	±2.0%	±3.5%	
MPD-120B	5V	10A	2A	7A	10A	12A	80mVp-p	±2.0%	±0.5%	±0.5%	76%
	24V	2.9A	0.3A	1.9A	2.9A	3.2A	250mVp-p	±8.0%	±2.0%	±4.0%	
MPT-120A	5V	10A	2A	7.3A	10A	12A	80mVp-p	±2.0%	±0.5%	±1.0%	72%
	12V	4.8A	0.4A	3.5A	4.8A	5.8A	120mVp-p	+8,-6%	±1.5%	±3.5%	
	-5V	0.6A	0A	0.3A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPT-120B	5V	10A	2A	7.3A	10A	12A	80mVp-p	±2.0%	±0.5%	±1.0%	73%
	12V	4.4A	0.4A	3.2A	4.4A	5.3A	120mVp-p	±6.0%	±1.5%	±3.5%	
	-12V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPT-120C	5V	10A	2A	7A	10A	11A	80mVp-p	±2.0%	±0.5%	±1.0%	72%
	15V	4A	0.4A	2.6A	4A	4.4A	150mVp-p	+6,-7%	±2.0%	±3.5%	
	-15V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPT-120D	5V	10A	2A	7.3A	10A	12A	80mVp-p	±2.0%	±0.5%	±1.0%	74%
	24V	2.2A	0.4A	1.6A	2.2A	2.64A	300mVp-p	+8,-6%	±3.0%	+4,-3%	
	12V	0.6A	0A	0.4A	0.6A	1A	120mVp-p	±5.0%	±0.5%	±1.0%	
MPQ-120B	5V	10A	2A	7.3A	10A	11A	80mVp-p	±2.0%	±0.5%	±0.5%	71%
	12V	4.2A	0.5A	3.1A	4.2A	5A	120mVp-p	±6.0%	±1.5%	±3.5%	
	-5V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
	-12V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPQ-120C	5V	10A	2A	7.3A	10A	11A	80mVp-p	±2.0%	±0.5%	±0.5%	71%
	15V	3.2A	0.5A	2.4A	3.2A	3.8A	150mVp-p	+6,-7%	±2.0%	±3.5%	
	-5V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
	-15V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPQ-120D	5V	10A	2A	7A	10A	11A	80mVp-p	±2.0%	±0.5%	±0.5%	74%
	12V	1A	0.2A	0.7A	1A	1.1A	150mVp-p	+8,-6%	±2.0%	±3.5%	
	24V	2.1A	0.3A	1.4A	2.1A	2.3A	300mVp-p	±8.0%	±2.0%	±3.5%	
	-12V	0.6A	0A	0.3A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	
MPQ-120E	5V	10A	2A	7.3A	10A	11A	80mVp-p	±2.0%	±0.5%	±0.5%	73%
	12V	3A	0.5A	2.3A	3A	3.3A	120mVp-p	±6.0%	±2.0%	±3.0%	
	15V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±8.0%	±2.0%	±3.0%	
	24V	0.6A	0A	0.4A	0.6A	1A	80mVp-p	±5.0%	±0.5%	±1.0%	

- Notes :
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor.
 3. Tolerance : includes set up tolerance, line regulation and load regulation.
 4. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.
 5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

Mechanical Specification

Unit:mm

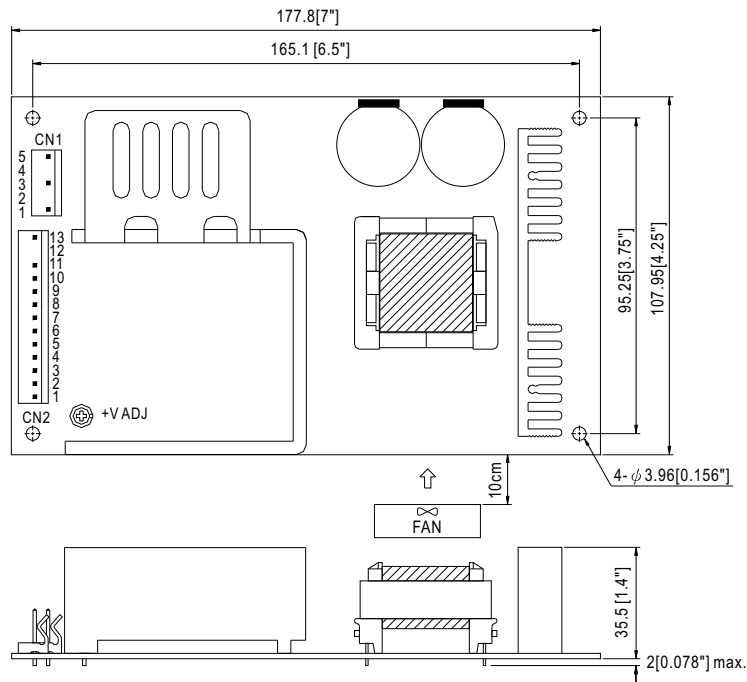

Pin Assignment


AC Input Connector (CN1) : Molex 5273-05 or equivalent

Pin No.	MPS-120	MPD-120	MPT-120	MPQ-120	Mating Housing	Terminal
1	FG	FG	FG	FG	Molex 5195 or equivalent	Molex 5194 or equivalent
2,4	No Pin	No Pin	No Pin	No Pin		
3	AC/N	AC/N	AC/N	AC/N		
5	AC/L	AC/L	AC/L	AC/L		

DC Output Connector (CN2) : Molex 5273-13 or equivalent

Pin No.	MPS-120	MPD-120	MPT-120	MPQ-120	Mating Housing	Terminal
1	+V	V1	V1	V1	Molex 5195 or equivalent	Molex 5194 or equivalent
2	+V	V1	V1	V1		
3	+V	V1	V1	V1		
4	-V	COM	COM	COM		
5	-V	COM	COM	COM		
6	-V	COM	COM	COM		
7	-V	COM	COM	COM		
8	+V	V2	V2	V2		
9	+V	V2	V2	V2		
10	P.F.D.	P.F.D.	P.F.D.	P.F.D.		
11	NC	NC	V3	V3		
12	No Pin	No Pin	No Pin	No Pin		
13	NC	NC	NC	V4		

Derating Curve

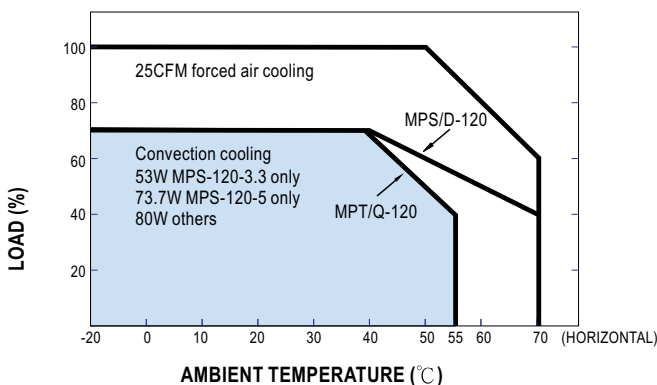

Static Characteristics

