


# PHILIPS

## Xitanium

### LED driver

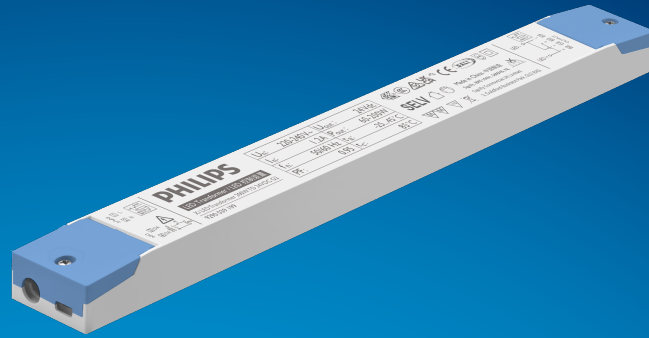

## Datasheet

### Xi LED Transformer 200W TD 24VDC G2

9290 039 19980

Philips Xitanium Constant Voltage drivers are designed to operate 24VDC LED solutions used both in built-in and independent applications such as shelf lighting, retail display lighting and facade lighting. Xitanium Constant Voltage drivers come with several protection features which guarantee reliable operation and 50,000 hours lifetime. They are specifically designed to ensure great EMI performance, high robustness and safe usage.

#### Features

- Dali 2.0 with 1-100% dimming
- Class II application
- Built in and independent
- Open Load/Short-circuit/Overpower Protection
- 50,000 hours lifetime

#### Benefits

- Dali 2.0 enables wired digital controls
- Provides options for different luminaire designs
- Great EMI performance for easy design-in
- Guarantee reliable operations
- Peace of mind with proven reliability

#### Application

- Retail display lighting
- Cove lighting
- Façade lighting
- Shelf lighting

## Logistical data

Specification item	Value
Product name	Xi LED Transformer 200W TD 24VDC G2
Logistic code 12NC	9290 039 19980
Pieces per box	36
Weight	505 gram

## Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V <sub>ac</sub>	Performance range
Rated input voltage	230	V <sub>ac</sub>	
Rated input frequency	50...60	Hz	Performance range
Rated input current	1	A	@ rated output power @ rated input voltage
Max. input current	1.2	A	@ rated output power @ minimum performance input voltage
Rated input power	220.0	W	@ rated output power @ rated input voltage
Power factor	0.95		@ rated output power @ rated input voltage
Total harmonic distortion	10	%	@ rated output power @ rated input voltage
Efficiency	93.0	%	@ rated output power @ rated input voltage
Input voltage AC	198...264	V <sub>ac</sub>	Operational range
Input frequency AC	47...63	Hz	Operational range
Standby Power (W)	< 0.5	W	
Isolation input to output	Reinforced		

## Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant Voltage		
Output voltage	24	V <sub>dc</sub>	Output voltage range: 22.8 ... 25.2VDC
Output voltage max.	26	V	
Rated output current	8333	mA	Performance range: 2500 ... 8333mA
Output voltage ripple	≤ 1	%	< 240 mVpp
Rated output power	200.0	W	Performance range: 60 ... 200W
Line regulation	≤ 1	%	
Load regulation	≤ 3	%	
Turn-on delay	≤ 1	s	
Output voltage rise time	≤ 30	ms	
Hold-up time	≥ 10	ms	

## Control interfaces

Specification item	Value	Unit	Condition
Control method	DALI, Touch & Dim (TD)		When using Touch & Dim, please refer to the Design in Guide.
Dimming range	1...100	%	PWM frequency: 2kHz
Isolation controls input to output	Reinforced		acc. IEC61347-1

## Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.75...1.5 / 16...18	mm <sup>2</sup> / AWG	Solid / stranded wire
Input wire strip length	6...7	mm	
Output wire cross-section	0.75...1.5 / 16...18	mm <sup>2</sup> / AWG	Solid / stranded wire
Output wire strip length	6...7	mm	
Control wire cross-section	0.75...1.5 / 16...18	mm <sup>2</sup> / AWG	Solid / stranded wire
Control wire strip length	6...7	mm	
Maximum cable length	2.5	m	Cable length between driver and LED modules per CISPR15

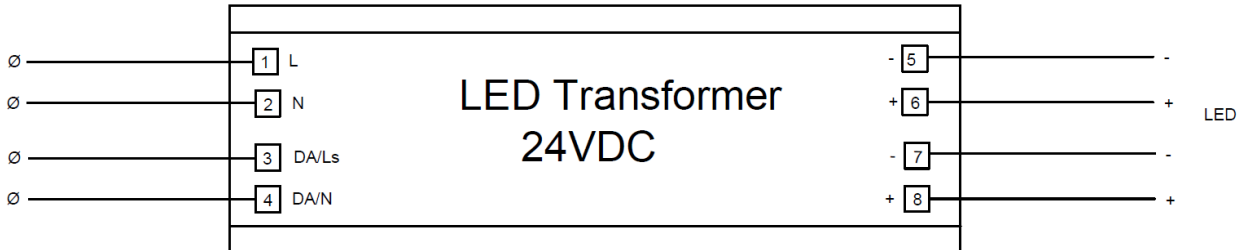


## Isolation

Insulation per IEC61347-1	Mains	LED	DALI
Mains	-	Reinforced	Basic
LED	Reinforced	-	Reinforced
DALI	Basic	Reinforced	-

## Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	400	mm	
Mounting hole distance (A2)	360.4	mm	
Width (B1)	40	mm	
Height (C1)	22	mm	
Mounting hole diameter (D1)	4.2	mm	
Weight	505	gram	

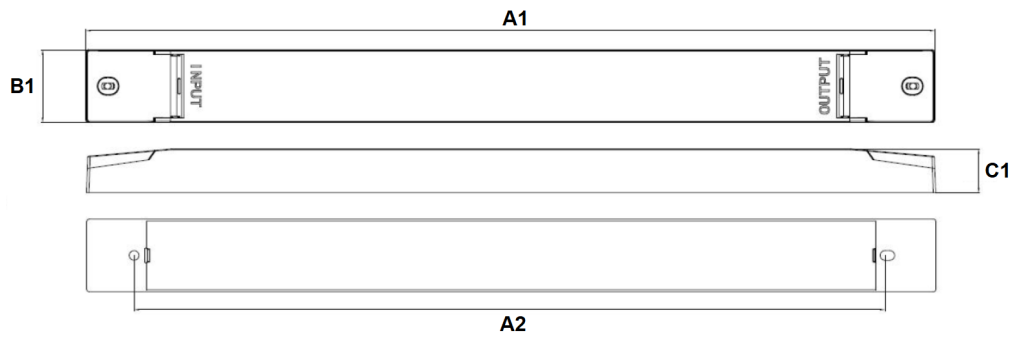


## Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+45	°C	Higher ambient temperature allowed as long as T <sub>case-max</sub> is not exceeded
T <sub>case-max</sub>	85	°C	Maximum temperature measured at T <sub>case-point</sub>
T <sub>case-life</sub>	85	°C	Measured at T <sub>case-point</sub>
Maximum housing temperature	110	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing
Noise and hum	≤ 20	dB(A)	@ rated output power @ rated input voltage

## Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at T <sub>case-point</sub> is T <sub>case-life</sub> . Maximum failures = 10%

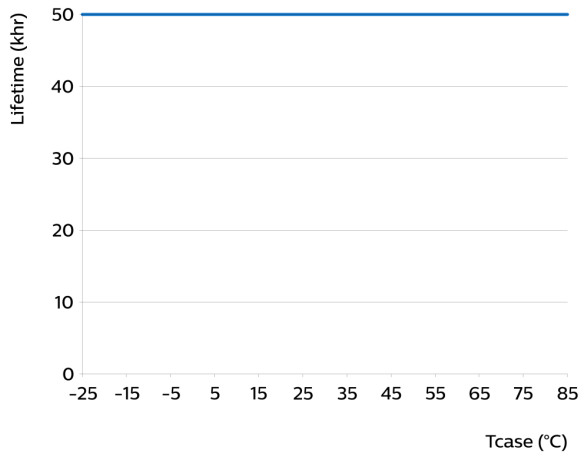

Maximum failures = 10%

### Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+85	°C	
Relative humidity	5...95	%	Non-condensing

### Non-programmable features


Specification item	Value	Unit	Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Hiccup mode, automatic recovering
Over power protection	Yes		Automatic recovering
Hot wiring	Yes		No load power < 0.5W
Suitable for fixtures with protection class	II		per IEC60598
Overtemperature protection	Yes		Automatic recovering

## Inrush current

Specification item	Value	Unit	Condition
Inrush current	56	A	Input voltage 230V
Inrush peak width	382	μs	Input voltage 230V, measured at 50% height
Drivers / MCB 16A type B @230V AC	≤ 5	pcs	Input voltage 230V

Please refer to the driver design in guide if you use other MCB-types.

If several mini circuit breakers are used directly side-by-side (without distance pieces) a correction factor of 80% has to be applied to the rated current

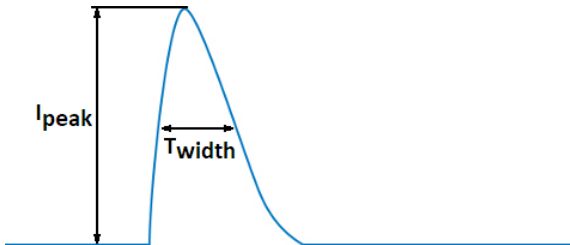

## Driver touch current / protective conductor current / earth leakage current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.7	mA peak	LED module contribution not included

## Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Control surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us


## Application Info (Approbation)

Specification item	Value
Approval marks and Certifications	110 / CB / CCC / CE / DALI 2 / ENEC / KC / MM / RCM(Do Not Cover) / SELV / UKCA
Ingress Protection classification (IP)	20
Application	Indoor Constant Voltage
Mounting Type	Built-in / Independent

## Graphs


### Operating window

---

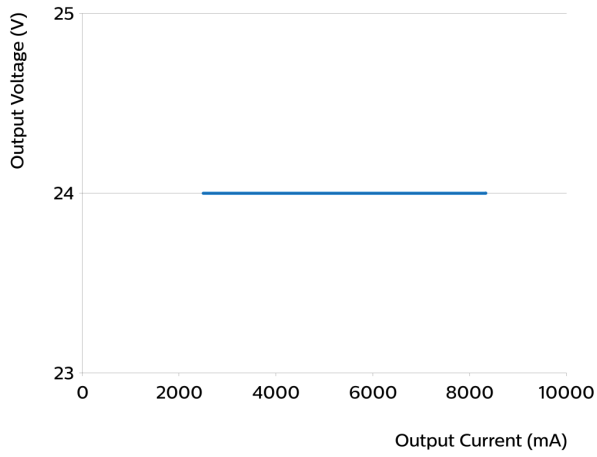


### Power factor versus output power

---

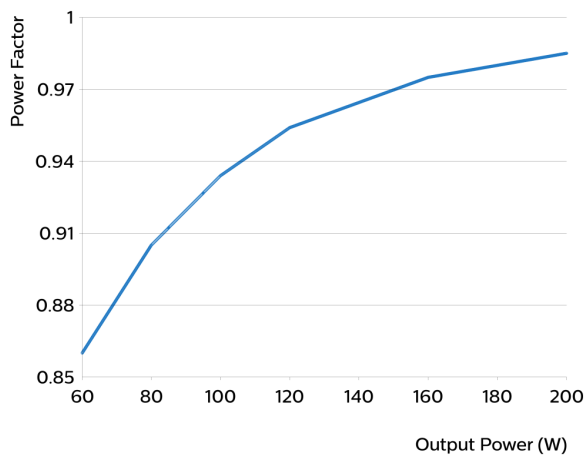


### Efficiency versus output power

---

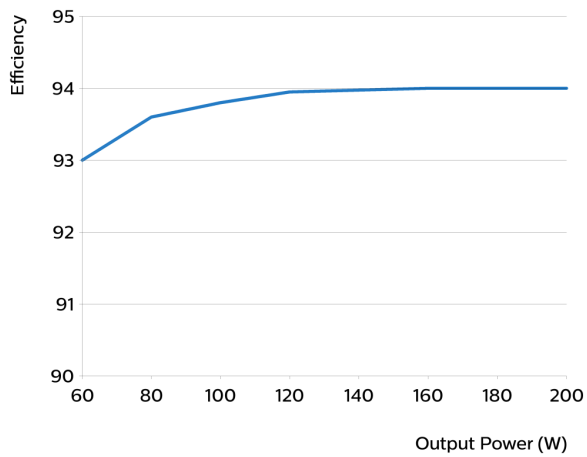


## THD versus output power

---

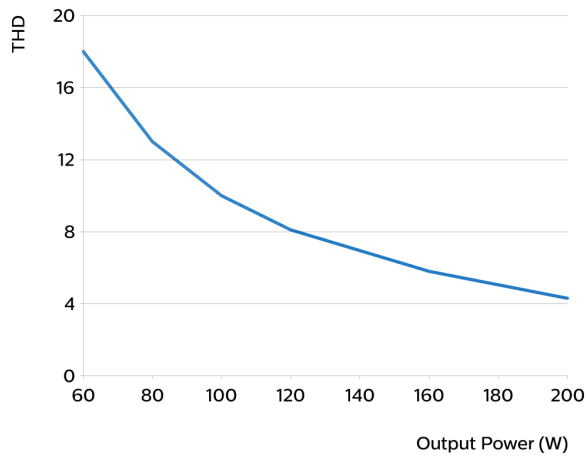

## V<sub>out</sub> as function of DALI interface

---

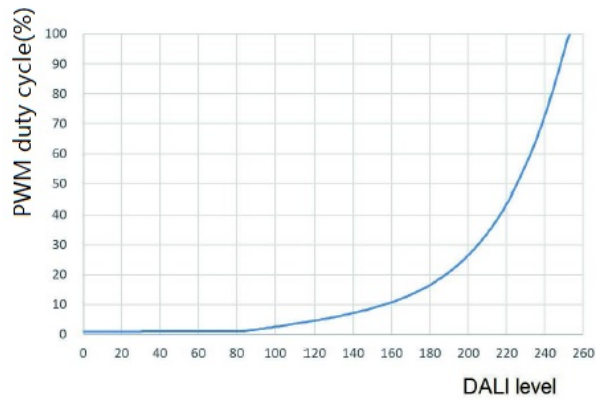

## Notes

---

1. All Parameters, if not specified, are typical value and measured at 230VAC/50Hz and 25°C ambient temperature.





©2024 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.  
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.  
Date of release: November 22, 2024 v1

[www.philips.com/oem](http://www.philips.com/oem)