

**60W**  
**DALI-2**  
**Dimmable**  
**Constant**  
**Current**  
**LED Driver**  
With Selectable  
Output

**5 YEAR**  
**WARRANTY**

**Features of the:**  
**DDC-60**



DALI-2  
IEC62386  
Compatibility



Output Current  
Selectable By  
DIP switch



AC Input Range:  
100-277VAC  
with PFC



IP20 Design  
For Indoor  
Installation



Class II  
Power Supply



Easy  
Installation



Protections:  
Short Circuit,  
Overload, Over  
Temperature



Built in  
PUSH  
Dimming




CE    IP20 SELV

Model		DDC-60							
Output	Rated Current (mA) ±25mA	600mA	700mA	800mA	900mA	1000mA	1100mA	1200mA	1300mA
	T ON L OFF	TTTT	TLLL	LTLL	TTLL	LLTT	TLLT	LTLL	TTTT
	DC Voltage	3-65V	3-65V	3-65V	3-65V	3-60V	3-55V	3-50V	3-46V
	Rated Power	39W	45.5W	52W	58.5W	60W	60W	60W	60W
	Rated Current (mA) ±25mA	1400mA	1500mA	1600mA	1700mA	1800mA	1900mA	2000mA	2100mA
	T ON L OFF	TTTT	TLLL	LTLL	TTLL	LLTT	TLLT	LTLL	TTTT
	DC Voltage	3-43V	3-40V	3-38V	3-35V	3-33V	3-32V	3-30V	3-29V
	Rated Power	60W	60W	60W	60W	60W	60W	60W	60W
Input	Rated Input Voltage	100-277VAC							
	Rated Frequency	47-63HZ							
	Power Factor	Full loading ≥ 0.93@230VAC							
	Efficiency (Typ.)	Full loading ≥ 86%@230VAC							
	AC Current (Max.)	0.75A							
	Inrush Current (Typ.)	25A, 7uS@50%Ipeak							
	Leakage Current	<0.50mA							
Protection	Short Circuit	Constant current mode, recovers automatically after fault condition is removed.							
	Output No-Load Voltage	79V max.							
	Over Temperature	Ambient temp. over 50±5°C, output current will be reduced to 50%; Ambient temp. over 60±5°C, output will be off; recovers automatically after temp. drops. - measured as case temperature tc=75±5°C							
	Protection Class	II							
Environment	Working TEMP.	-40-+60°C							
	Working Humidity	20-90%RH, non condensing							
	Storage TEMP. Humidity	-40 - +80°C, 10-95%RH							
	TEMP. coefficient	+0.03%/°C, (0-50°C)							
	Vibration	10-500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes.							
Safety	Safety Standards	EN61347-1 EN61347-2-13							
	Withstand Voltage	I/P-O/P:3.75KVAC							
	Isolation Resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH							
Others	Weight	0.3kg							
	Size	192.5*62*24mm (L*W*H)							
	Packing	290*215*140mm (50PCS/CTN) for outer carton.							
Notes	<ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>Specifications are subject to change without prior notice. Contact your supplier to confirm any critical parameters.</li> </ol>								


## Mechanical Specification

- Input 3 pole terminal block:  
Active AC (L), Neutral AC (N).
- Output 2 pole terminal block:  
Positive (LED+), Negative (LED-).
- DALI or PUSH Dim. Terminals 2P: when DALI dimming, the lines are not polarised.
- Suggested wire diameter: Input 0.75-2mm<sup>2</sup>; Output: 0.5-2mm<sup>2</sup>.
- Ensure that all wiring is correct before testing in order to avoid damage to the LED driver or the LEDs.

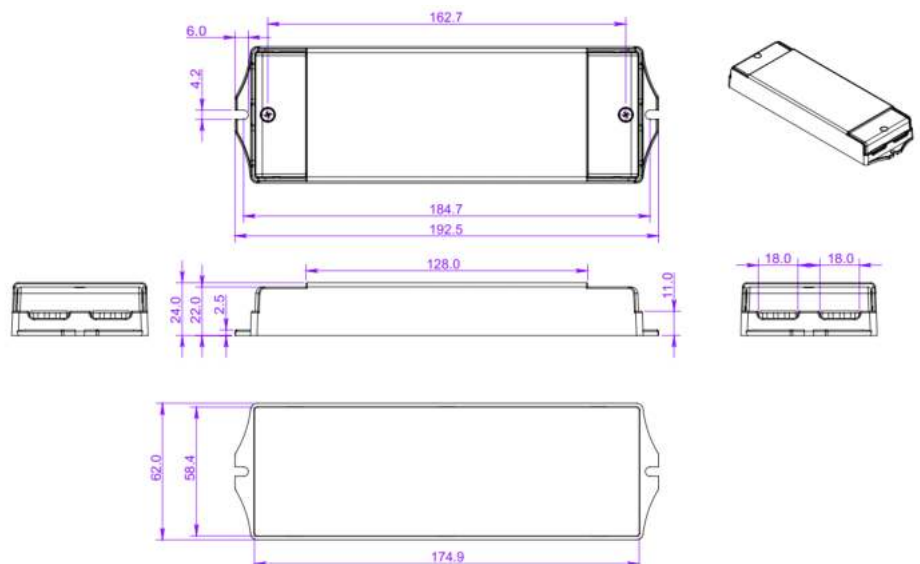


## ■ Dimming Operation


### DALI Dimming Wiring Diagram1

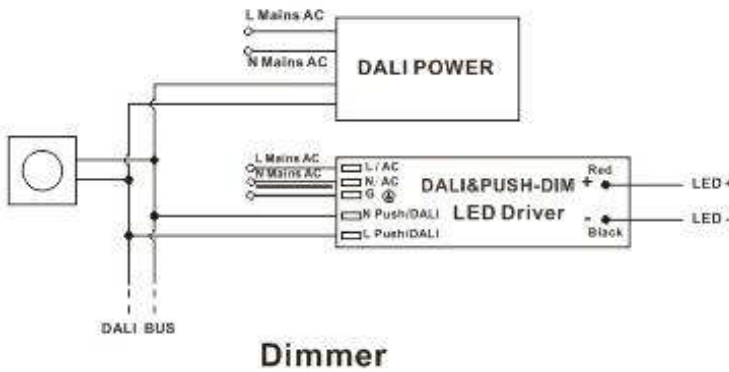


### DALI Dimming Wiring Diagram2

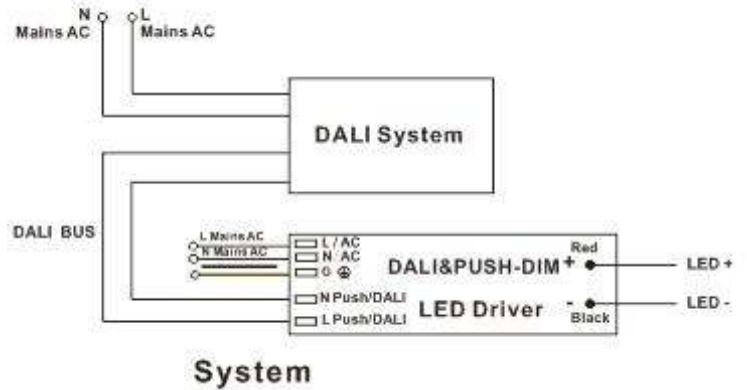


### DALI Dimming Wiring Diagram3

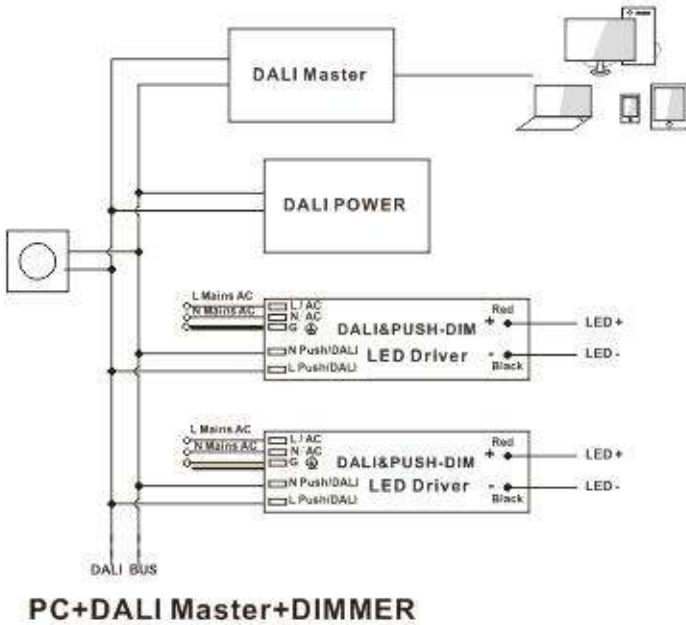

### Push-Dimming Wiring Diagram 1

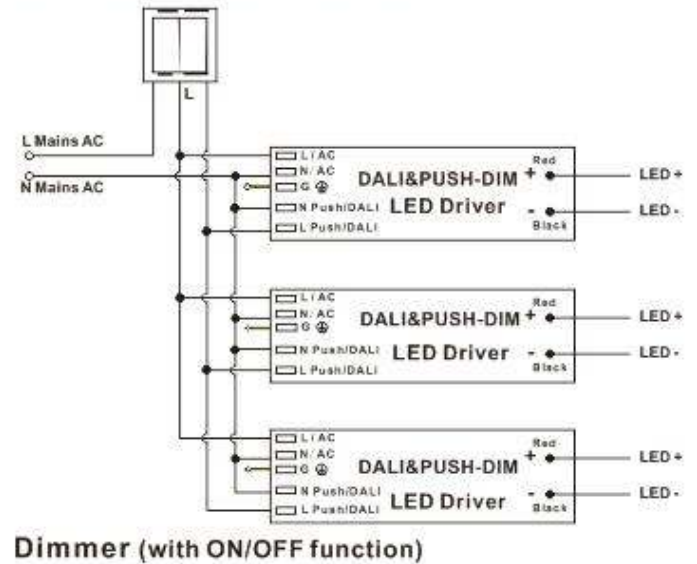

### Push-Dimming Wiring Diagram2

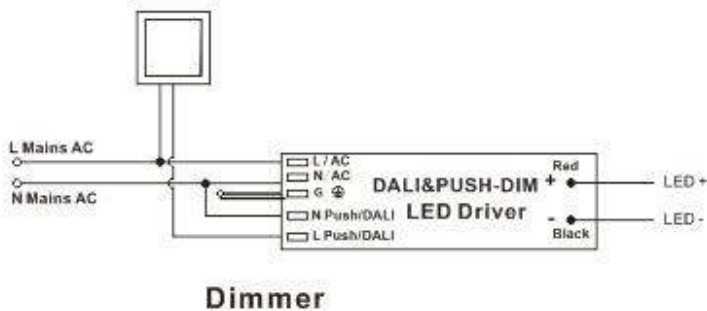

- Note: For DALI Dimming Wiring Diagram 3, only one DALI power is required in the DALI bus, no extra DALI power is needed if the Master or Dimmer already includes the DALI Power.


## De-rating Curve

- If being used in higher ambient temperatures, ensure the load on the LED driver is de-rated in accordance with this chart. Failure to do so could lead to a premature failure, which is not covered by the warranty.

## Instruction:

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid LED and power supply damage.

Any other question please feel free to contact ADM Systems Pty Ltd.

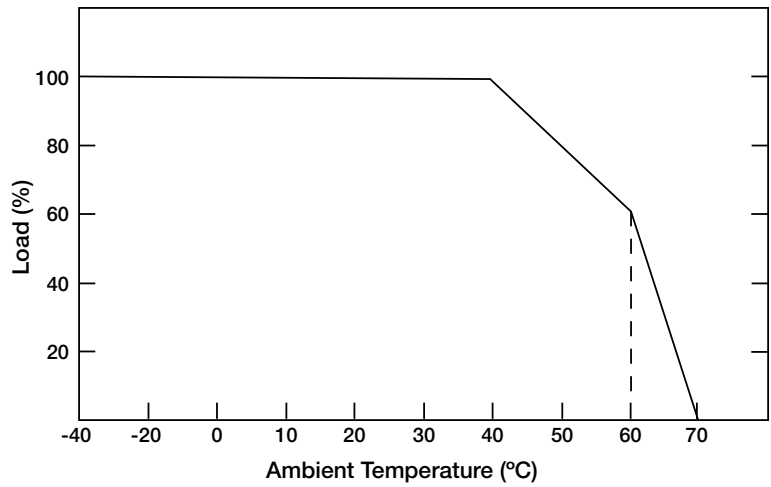

To extend their life, please refer to the De-rating Curve and de-rate according to the temperature.